


Submersible Pump

ST-40

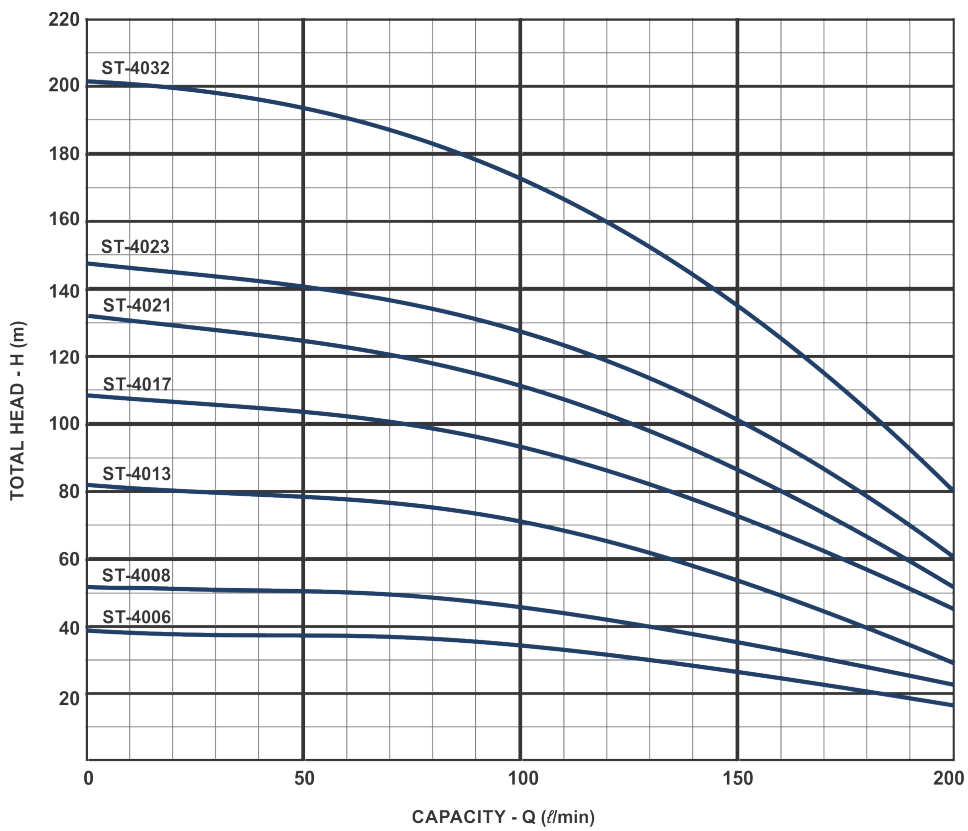

| Selection Chart | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|--------|-------|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|-----|-------------|-------------|------|
| Pump Type | Stages | Motor | Q = Delivery | | | | | | | | | | | | | | | | | PUMP | | |
| | | | l/min | 30 | 35 | 40 | 45 | 50 | 60 | 70 | 80 | 90 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | Length (mm) | Weight (kg) | |
| | | | m ³ /h | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 | 12 | 13 | | | |
| H = Total Head in Meters | | | | | | | | | | | | | | | | | | | | | | |
| ST-4006 | 6 | 1.1 | 39 | | | | | | | | | 36 | 35 | 34 | 32 | 29 | 26 | 22 | 17 | | 356 | 3.4 |
| ST-4008 | 8 | 1.5 | 52 | | | | | | | | | 48 | 47 | 46 | 43 | 39 | 35 | 29 | 24 | | 418 | 4.0 |
| ST-4013 | 13 | 2.2 | 82 | | | | | | | | | 75 | 73 | 71 | 66 | 59 | 50 | 40 | 30 | | 573 | 5.5 |
| ST-4017 | 17 | 3.0 | 108 | | | | | | | | | 98 | 96 | 94 | 87 | 79 | 70 | 58 | 46 | | 697 | 6.5 |
| ST-4021 | 21 | 3.7 | 132 | | | | | | | | | 117 | 114 | 111 | 103 | 93 | 82 | 68 | 52 | | 859 | 7.8 |
| ST-4023 | 23 | 4.0 | 148 | | | | | | | | | 134 | 131 | 127 | 118 | 108 | 95 | 79 | 60 | | 921 | 8.4 |
| ST-4032 | 32 | 5.5 | 202 | | | | | | | | | 182 | 178 | 172 | 160 | 143 | 125 | 105 | 80 | | 1238 | 11.0 |